

ECODRY



The ECODRY drying gun is used to aid the drying of water-based paints: by blowing on the painted surface, it helps to evaporate the residual water thus reducing working time.

The ECODRY, exploiting the Venturi system, allows to increase of about 15 times the compressed air admitted.

The compressed air must be filtered perfectly to avoid entry of impurities and compromission of finishing qualities.

ECODRY STAND

Height and depth adjustable for ideal adjustment to the surface to be dried.

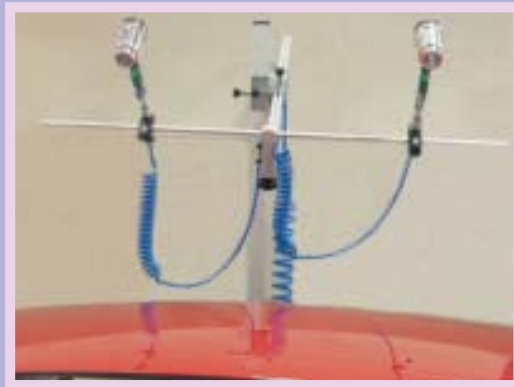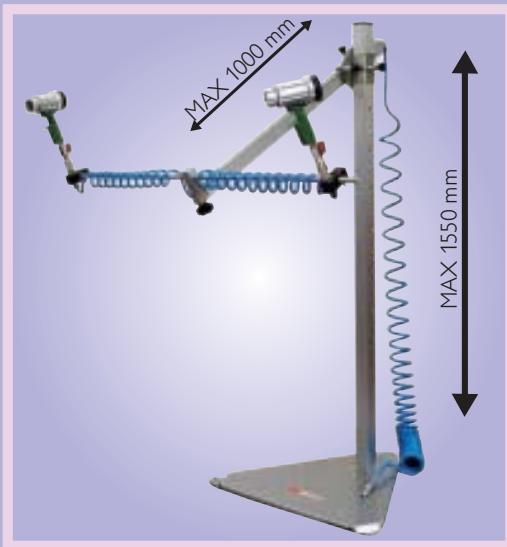



Example of use on car bonnet.

ECODRY

- **Body:** anodized aluminium
- **Blowing distance:** blow directly on the painted surface from a distance of 40-50 cm moving the gun continuously
- **Blowing time:** follow the instructions provided by the paint manufacturer
- **Equipped with inlet air flow regulator**
- **ADJUSTABLE AIR FLOW**



REF.				
60125	1 pcs.	550 gr.	0,5 - 2 Bar	200 - 300 lt./min.

ECODRY STAND

- **Equipped with 2 ECODRY it is completely independent. ECODRY STAND dries any type of surface from 1 mt distance.**
- **Featuring:** tubular frame in anodized aluminium
- **Base:** painted steel
- **Fittings:** X 300 U
- **Hose:** poliurethane spirial hose 4+4 mt



REF.			
60126	1 pcs.	18 Kg	1,55 x 1,00 mt